Thule Cargo Rack

> Instructions

PARTS DESCRIPTION
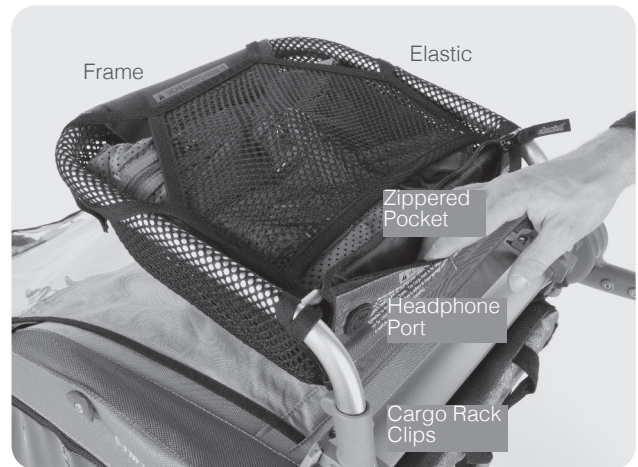
Quick Release Levers

Mesh Cover

Frame

Elastic

Zippered Pocket

Headphone Port

Cargo Rack Clips

GENERAL WARNING

These instructions contain many WARNINGS. Read and understand all of the WARNINGS. Failure to assemble and use this accessory correctly may lead to serious personal injury to your passenger.

- For the Thule Cargo Rack to be properly secured, both quick release levers on the Thule Cargo Rack clips must be fully closed. Failure to fully close the clips could result in the Thule Cargo Rack separating from the Thule child carrier.

- Do not exceed the maximum capacity of 2.3kg/5lb in the Thule Cargo Rack as the Thule child carrier could become unstable and potentially tip.
- Ensure that all items placed in the Thule Cargo Rack are anchored securely and cannot come into contact with the occupant's head(s).
- Do not place sharp and/or heavy objects in the Thule Cargo Rack.
- The Thule Cargo Rack is for cargo only, not for children or pets!

1.0 THULE CARGO RACK INSTALLATION AND REMOVAL

A. From the rear of the Thule child carrier, place both Thule Cargo Rack clips over the Thule Accessory Cross Bar. (See image 1)

B. Open the quick release levers and hook the clips over the Thule Accessory Cross Bar until the clips sit evenly on the bar. (See image 2)

C. Close the quick release levers fully so that the Thule Cargo Rack fits tightly onto the bar. (See image 3)

D. To remove the Thule Cargo Rack, open the quick release levers fully and pull off the Thule Cargo Rack.

2.0   PROPER USE OF THE THULE
           CARGO RACK

⚠️ **WARNING**

The Thule Cargo Rack is designed for carrying lightweight, soft items only! The maximum capacity of the Thule Cargo Rack is 2.3 kg/5 lb.

NOTICE

Your Thule child carrier can experience sharp movements during use. Ensure that all rack contents are securely restrained.

A.   Place your cargo into the Thule Cargo Rack. The item(s) can be secured with either the elastic strap(s) (See image 1) or the mesh cover. (See image 2)
B.   Ensure the cargo is at least 75mm/3" from the occupants head(s).