


Thule Jogging Kit

➤ Instructions

PARTS DESCRIPTION

Two Aluminum Jogging Arms

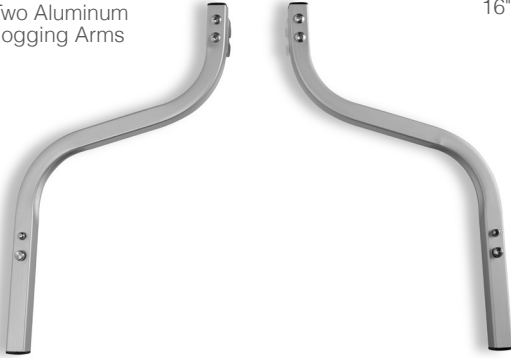

16" Jogging Wheel



Quick Release Wheel Skewer




GENERAL WARNING

These instructions contain many WARNINGS. Read and understand all of the WARNINGS. Failure to assemble and use this child carrier correctly may lead to serious personal injury or death to you or your passenger.

- To prevent the child carrier from tipping backwards, the storage bags at the rear of the child carrier must not be loaded with excessive weight. Carry out the following check while the child carrier is standing on a flat surface: Push downwards on the handlebar by about 15cm/6in and release. The child carrier should return to its original standing position and should not tip backwards. Manufacturer's recommendation: The maximum combined load of all storage bags is 4kg/8.8lb together if no handlebar bag is being used.
- The maximum load of the handlebar bag is 1kg/2.2lb. The maximum load of the other rear storage bags is reduced to 2kg/4.4lb if the handlebar bag is loaded with 1kg/2.2lb.
- When using the child carrier as a Jogging Stroller, always put the safety wrist strap, which is fastened securely on the left rear upper frame tube, around your wrist to prevent the child carrier from accidentally becoming separated from you.
- THIS PRODUCT IS NOT SUITABLE FOR INLINE SKATING.

1.1 INSTALLING THE JOGGING ARMS

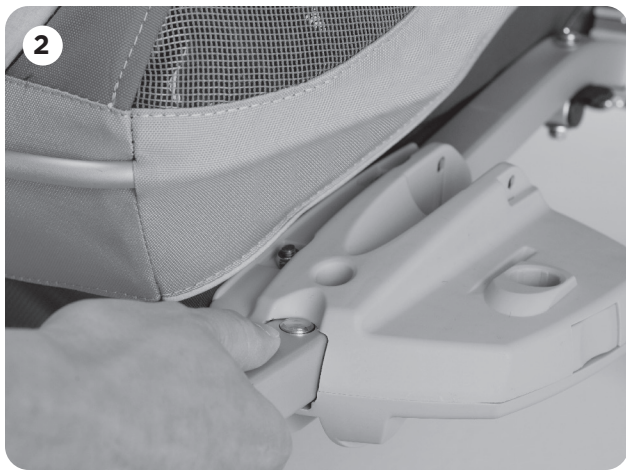

- A. Position both of the jogging arms in front of the Thule child carrier with the wheel dropouts forward. (See image 1)
- B. Insert the jogging arms into its corresponding VersaWing™. Make sure that the wheel dropout is pointed downward. (See image 2)
- C. Press and hold the small button on the jogging arm.
- D. Slide the jogging arm into the VersaWing™ until the large button enters inside the VersaWing™.
- E. Release the small button on the jogging arm.
- F. Continue to slide the jogging arm into the VersaWing™ until the large button snaps into the first hole in the VersaWing™.
- G. Repeat for the other jogging arm.
- H. Verify that both of the jogging arms are securely attached to the Thule child carrier by giving them a sharp pull away from the Thule child carrier.



WARNING

Make sure that the wheel arms are correctly attached to the Thule child carrier. Incorrect attachment may lead to loss of the front wheel.

1.2 INSTALLING THE QUICK RELEASE SKEWER



- A. Completely unscrew and remove the quick-release knob from the quick-release skewer.
- B. Remove one of the springs from the quick-release skewer.
- C. Insert the quick-release skewer through the jogging wheel. (See image 3)
- D. Replace the spring back onto the quick-release skewer, narrow end pointing inward, toward the jogging wheel.
- E. Replace and tighten the quick-release knob. (See image 4)

1.3 INSTALLING THE JOGGING WHEEL



- A. Guide the jogging wheel up into the wheel dropouts until the wheel axle is resting inside the wheel dropouts. (See image 1)
- B. Close the quick-release lever. (See image 2)
- C. Tighten the quick-release knob until finger tight.
- D. Open the quick-release lever.
- E. Tighten the quick-release knob another half turn.
- F. Close the quick-release lever. (See image 2)
- G. Verify that the jogging wheel is securely attached to the jogging arms by giving it a sharp pull downward.




WARNING

Always make sure that the skewer is correctly installed. An incorrectly tensioned quick-release skewer may lead to loss of the front wheel.

1.4 REMOVING THE JOGGING KIT

- A. Open the quick-release lever.
- B. Pull the jogging wheel out of the wheel dropouts.
- C. Press and hold the small button on one of the jogging arms.
- D. Pull the jogging arm out of the VersaWing™.
- E. Repeat with the other jogging arm.

1.5 ALIGNING THE JOGGING WHEEL

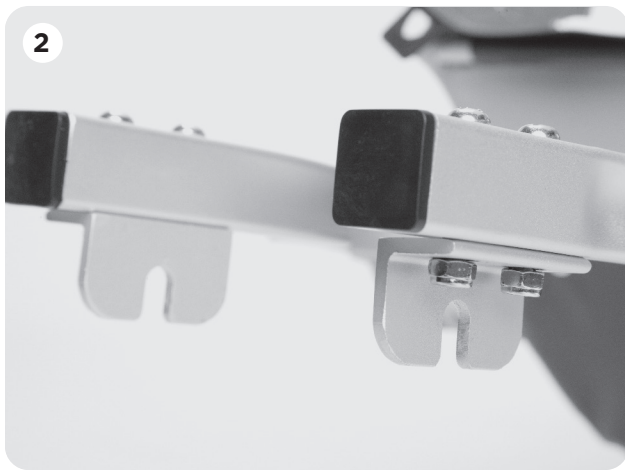

- A. With the jogging kit installed, take note of which way the Thule child carrier is tracking. (See image 1)
- B. Remove the jogging wheel from the jogging arms.
- C. Slightly loosen the bolts attaching the drop-out to the jogging arm on the opposite side that the Thule child carrier is tracking. (See image 2)
- D. Gently tap the drop-out on the front so that it slides back slightly, towards the Thule child carrier. (See image 2)
- E. Retighten the bolts.
- F. Reinstall the jogging wheel and test the alignment.
- G. Repeat if necessary.



WARNING

Ensure that all of the bolts on the jogging kit are retightened before using it again.


1.6 STORING THE JOGGING KIT (COUGAR & CX MODELS ONLY)



- A. Place the left jogging arm into the left Click n' Store™ bracket and the right jogging arm into the right Click n' Store™ bracket. The large button should be pointed outwards and the wheel dropouts should be on the bottom. (See image 3)
- B. Snap the jogging arms into the Click n' Store™ brackets ensuring that the large button locks in the bracket. (See image 4)
- C. Place the jogging wheel on the back of the cargo bag.
- D. Strap the jogging wheel onto the cargo bag using the 3 straps (2 straps, 1 buckle) on the back of the cargo bag.

NOTICE

Arms must be removed before collapsing the Thule child carrier.

 Thule Child Transport Systems Ltd.
105 - 5760 9th Street SE Calgary, AB T2H 1Z9 Canada

 info@thule.com

 www.thule.com

» PART OF THULE GROUP