

**Thule Glide/Urban Glide 1 & 2
Car Seat Adapter**

> Instructions

CONNECTORS

- A. Attachment Clips
- B. Seat strap

GENERAL WARNING

These instructions contain many WARNINGS. Read and understand all of the WARNINGS. Failure to assemble and use this accessory correctly may lead to serious personal injury or death to your passenger.


- This Thule Car Seat Adapter is designed to fit a Thule Glide and Thule Urban Glide 1 & 2 child carriers.
- For the Thule Car Seat Adapter to be properly secured all quick release clips must be fully closed and the seat strap must be buckled over the car seat. Failure to fully close the clips and buckle the seat strap could result in the Car Seat or the Thule Car Seat Adapter separating from the carrier.



Car seats compatible with the adapter can be found at [thule.com](https://www.thule.com).



THULE CAR SEAT ADAPTER INSTALLATION FOR GLIDE/URBAN GLIDE 1

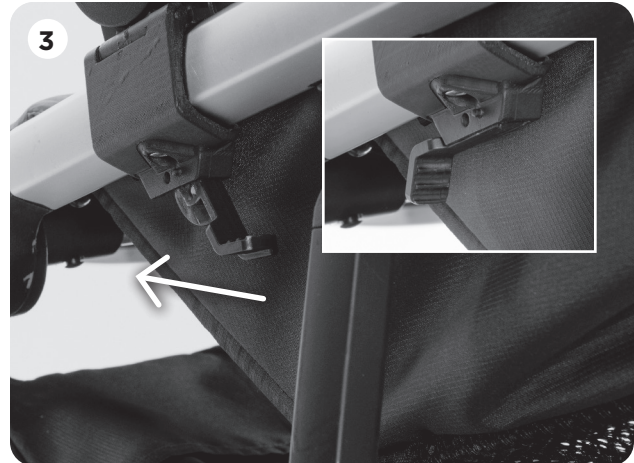

- A. Engage the parking brake on the child carrier.
- B. Open the clips on the Thule Car Seat Adapter. (See Image 1)
- C. Locate the Thule Car Seat Adapter on the frame by aligning the clips to a stud on the frame. (see Image 2)
- D. Close the clips on the Thule Car Seat Adapter and lock the secondary lever, repeat for other side. (See Image 3)

- E. Verify that the Thule Car Seat Adapter is securely attached to the carrier by giving it a sharp pull away from the carrier.
- F. Unfold the Thule Car Seat Adapter. (See Image 4)
- G. To remove the Thule Car Seat Adapter, open all clips and lift the adapter off of the carrier.
- H. To fold the carrier with the Thule Car Seat Adapter on it, fold the Thule Car Seat Adapter, buckle the seat strap and then fold the carrier.



WARNING

Always verify that the Thule Car Seat Adapter is securely attached to the carrier, especially after transporting the carrier in a vehicle and folding it.

THULE CAR SEAT ADAPTER INSTALLATION FOR URBAN GLIDE 2



- A. Engage the parking brake on the child carrier.
- B. Open the clips on the Thule Car Seat Adapter. (See Image 1)
- C. The Thule Car Seat Adapter must be installed on the left side (facing the carrier) of the carrier. (See Image 2)
- D. Open the velcro and zipper on the center seat divider to expose the integrated accessory adapter. (See Image 3)

- E. Align the clip on the Thule Car Seat Adapter with the integrated accessory adapter and close the clip, ensuring the fabric is not underneath the adapter. (See Image 4)
- F. Locate and align the stud on the left side frame of the carrier and close the clip to secure the Thule Car Seat Adapter. (See Image 5)
- G. Verify that the Thule Car Seat Adapter is securely attached to the carrier by giving it a sharp pull away from the carrier. Close the velcro.
- H. Unfold the Thule Car Seat Adapter.
- I. To Remove the Thule Car Seat Adapter, open all clips and lift the adapter off of the carrier.
- J. To fold the carrier with the Thule Car Seat Adapter on it, fold the Thule Car Seat Adapter, buckle the seat strap and then fold the carrier.



WARNING

Always verify that the Thule Car Seat Adapter is securely attached to the carrier, especially after transporting the carrier in a vehicle and folding it.

CAR SEAT INSTALLATION AND REMOVAL



- A. Engage the parking brake on the carrier. Insert the car seat (See Image 1) with the occupant facing toward the handlebar. The car seat should be angled according to the car seat manufacturer's instructions.
- B. Buckle the seat strap over the car seat and pull the strap tight. (See Image 2)
- C. Verify that the car seat is securely attached to the carrier by gently lifting up on the car seat handle.
- D. To remove the car seat from the carrier, apply the parking brake, unbuckle the seat strap, and lift the car seat up out of the car seat adapter.



WARNING

If the car seat cannot sit at the right angle, the car seat does not fit the adapter and cannot be used with the Thule Car Seat Adapter.



WARNING

Your child should always be facing you when using the Thule Car Seat Adapter. Never place a car seat in the Thule Car Seat Adapter with the child facing forwards on the carrier.

Never leave the carrier unattended when a child is in a car seat attached to the carrier.

When using the Thule Car Seat Adapter always secure the child in the car seat with the car seats manufacturer's seatbelt.